


 TILE CARPETING**GENERAL INFORMATION**

- 1.1 Carpet tile is the CUFO standard for carpeted surfaces. Any desired deviation from 1) this requirement, 2) approved manufacturers, or 3) flooring material selections for stair treads and risers may be requested in writing and submitted prior to the design review meeting with the CUFO Project Manager and Design and Compliance.

DESIGN REQUIREMENTS

- 2.1 Approved Carpet Vendors. Refer to the respective lookbooks for pre-approved products.
- a. Interface
 - b. Mohawk
 - c. Shaw
- 2.2 All carpet, cushions, and adhesive shall display the CRI (Carpet and Rug Institute) Carpet Testing Program label.
- 2.3 All carpet systems shall comply with the CRI (Carpet and Rug Institute) indoor air quality green label emissions testing program (ASTM D 5116) for carpet.
- 2.4 All primers and adhesives must be approved by manufacturer and be strippable, waterproof, non flammable, non combustible, low-odor and low VOC, and meet the requirements of one of these certifications:
- a. MAS Certified Green
 - b. NSF/ANSI 332 Multi-attribute certifications
 - c. NSF/ANSI 140 Multi-attribute certifications
 - d. VOC Green Program by Benchmark International
 - e. Indoor Advantage Gold by SCS
 - f. Greenguard Gold
 - g. Green Label Plus (GLP) by CRI
 - h. FloorScore by SCS
 - i. ClearChem by Berkeley Analytical
 - j. Clea Air Gold by Intertek
 - k. CHPS Products by Collaborative for High Performance Schools (CHPS)
- 2.5 All carpet to be installed as per "Standard of installation of Carpet" CRI 104 CRI (Carpet and Rug Institute)
- 2.6 Below grade concrete slabs shall receive a waterproofing sealer as per flooring manufacturer's recommendation.

- 2.7 CU participates in **Takeback Programs** with the approved manufacturers. Any demolished material is to be palletized and shipped to the manufacturer selected for the new material on the project.
- 2.8 Meet the following values:

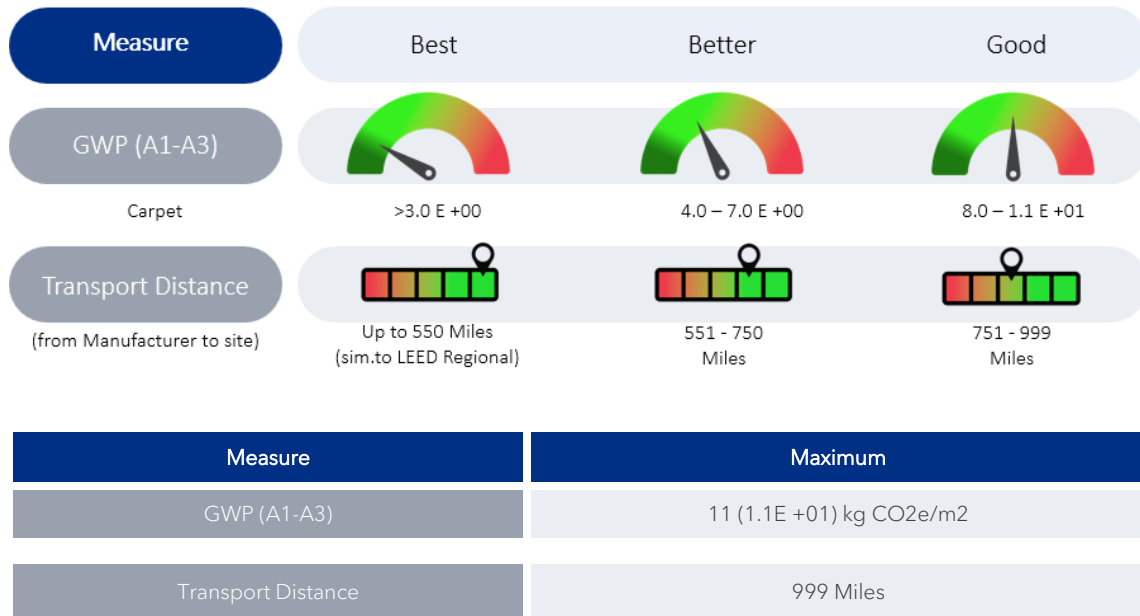

CONSTRUCTION REQUIREMENTS

- 3.1 Submit shop drawings including carpet directional layout.
- 3.2 Provide 5% or agreed upon amount of attic stock to hand off to the Project Manager at the conclusion of the project.